




Ovation GR-1 IP

Ovation GR-1IP is an IP65 outdoor rated gobo rotator for the Ovation E-260WW IP. It can rotate continually in either direction as slow as 0.047 RPM (17 degrees per min), all the way up to 21 RPM. Power and control for this unique gobo rotator are delivered from the dedicated port on the [Ovation E-260WW IP](#), and its fully indexable via the unit's DMX personality. The rotator can hold two B-size gobos that counter rotate.

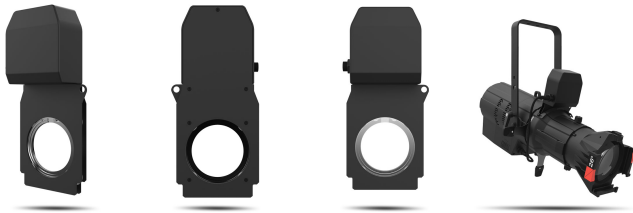

AT A GLANCE

- IP65 rated gobo rotator for one single or two counter-rotating gobos
- Fully controllable via the Ovation E-260WW IP control personalities
- Variable speed, bi-directional 0.047-21 RPM (17°- 7,560° per minute) standard rotation
- Fully indexable positioning via DMX
- Dedicated power/control supplied by the [Ovation E-260WW IP](#)
- Stepper motor driven for ultra-quiet and super smooth movement without stalling or stuttering

Specifications

Dynamic Effects

- Gobos size: B (metal, glass or effect)
- Effects: CW or CCW Rotation, indexing, infinite rotation at variable speeds
- Speed Range: 0.047 – 21 RPM (17° - 7,560° per minute)

Construction / Physical

- Dimensions: 10.9 x 4.7 x 2.2 in (277.5 x 120.5x 56.9 mm)
- Weight: 2.4 lb (1.2 kg)
- Exterior Color: Black
- Housing Material: Aluminum die-cast

Connections

- Power Connection: Proprietary 4-pin IP65 input power/data cord (19 in/483 mm)
- Data Connectors: Proprietary 4-pin IP65 input power/data cord (19 in/483 mm)
- Cable Length (power/data): 19 in/483 mm

Control

- Control Protocol: DMX
- DMX Channels: 1

Electrical

- Input Voltage: 24 VDC, 372 mA (via [Ovation E-260WW IP](#))

Certifications / Qualifications

- CE
- IP Rating: IP65, temporary outdoor/wet use
- Temperature (Ambient): -4 °F to 113 °F (-20 °C to 45 °C)

What's Included

- Ovation GR-1 IP
- Power & Data Control Cable